

8.1 Overview

Go To Top

The Logical Information Model defines the platform-independent information structures that [Logical Nodes](#) exchange, record, interpret, validate, govern, trace, and [Evidence](#).

This model specialises the Part 1 concepts of [Data Structure Definition](#) and [Data Structure Instance](#). It adds logical information categories such as logical [messages](#), [events](#), [commands](#), acknowledgements, [assertions](#), and [records](#).

The Logical Information Model does not prescribe a data serialisation format, schema language, programming language type system, database structure, ontology language, or wire representation. Implementation profiles select mechanisms such as IDL, Protocol Buffers, JSON Schema, XML Schema, Avro, OpenAPI schemas, UML, SysML, ontology classes, database schemas, generated language types, or other formal representations.

Figure 8-1 summarises the primary relationships in the Logical Information Model.

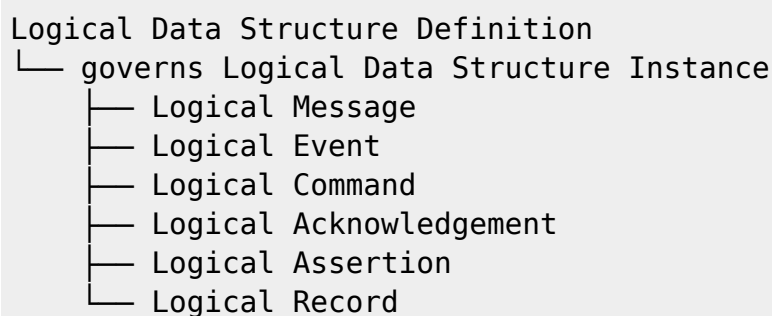


Figure 8-1: Primary relationships in the Logical Information Model

© 2026 Dido Solutions, Inc. and Jackrabbit Consulting, Inc.

From:
<https://wiki.didosolutions.com/> - **Dido Solutions, Inc Wiki**

Permanent link:
<https://wiki.didosolutions.com/fxdemo/02-part/08-logical-information-model/08-1-overview/start?rev=1783104287>

Last update: **2026/07/03 11:44**

